E6 DATA SHEET

SPECIFICATIONS & PERFORMANCE

1/4” Bolted Plastic

with Plastic Center Sections

PERFORMANCE

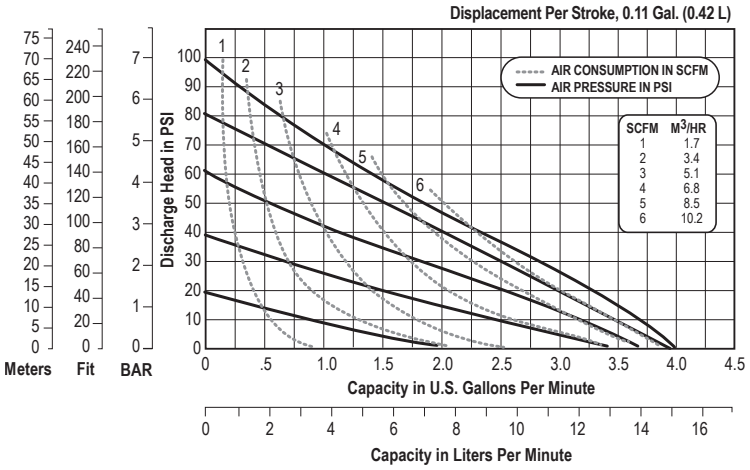

SPECIFICATIONS

Flow Rate
Adjustable to . . . . . 0-4 gpm (15 lpm)
Port Size
Suction . . . . . 1/4” NPT (BSP)
Discharge . . . . . 1/4” NPT (BSP)
Air Inlet . . . . . .1/4” NPT
Air Exhaust . . . . . .1/4” NPT
Suction Lift
Dry . . . . . 8’ (2.44 m)
Max Solid Size (Diameter)
. . . . . 1/32” (1 mm)
Max Noise Level . . . . . .78 dB(A)
Shipping Weights
Conductive Acetal . . . 3 lbs (1.40 kg)

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

DIMENSIONS

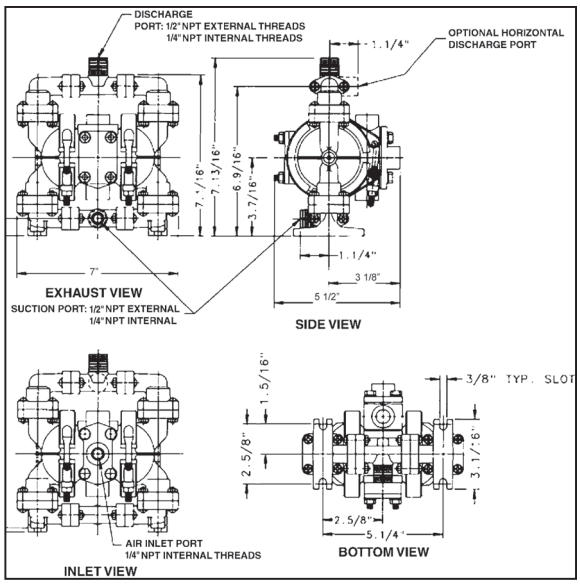

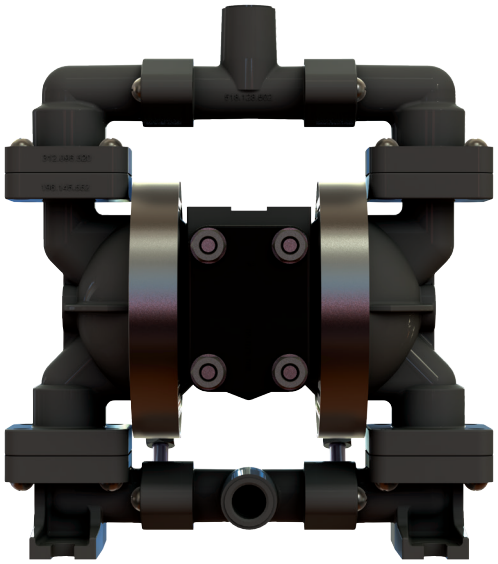

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e6nmdlCdsATEX-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.