


EXTRUDED ALUMINUM, 6" DEEP, HORIZONTAL FIXED TYPE BLADE FOR WIND DRIVEN RAIN

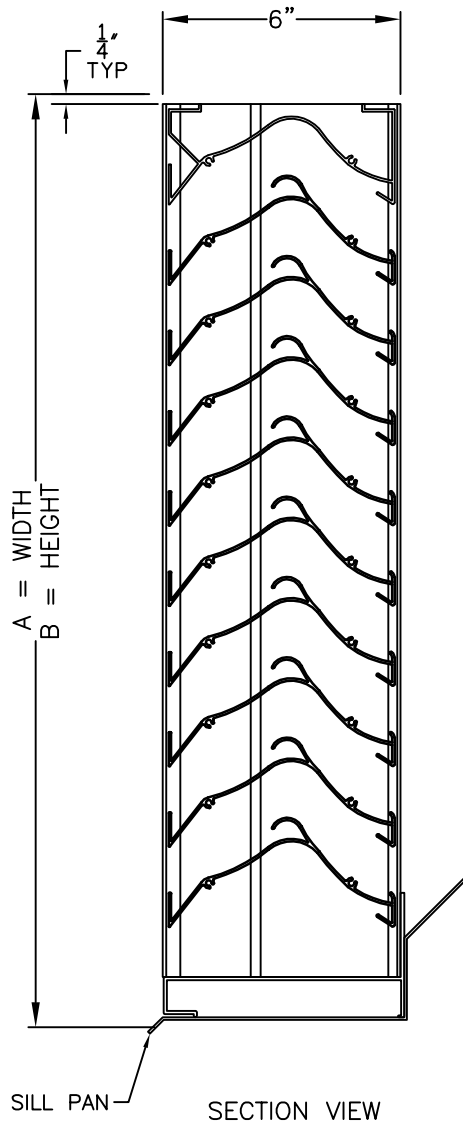

MODEL LE-69
STANDARD SPECIFICATIONS

FRAME: 6" DEEP CHANNEL, .081" THICK 6063-T6 EXTRUDED ALUMINUM ALLOY.

BLADES: .060" THICK 6063-T6 EXTRUDED ALUMINUM ALLOY.

FINISH: MILL.

SILL PAN: .060 THICK FORMED ALUMINUM.


SCREEN: 1/2" REMOVABLE EXPANDED ALUMINUM BIRD SCREEN, LOCATED ON INTERIOR.

MAXIMUM PANEL SIZE: 96" X 96".


MINIMUM PANEL SIZE: 12" X 12".

DIMENSIONS: "A" (WIDTH) AND "B" (HEIGHT) ARE OPENING SIZES. LOUVERS ARE MADE 1/2" UNDERSIZE.


* PANELS OVER 60" WIDE WILL BE 7-1/2" DEEP DUE TO A VERTICAL INTERIOR BLADE SUPPORT ANGLE.

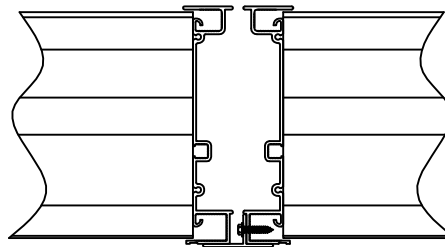


STANDARD VERTICAL MULLION

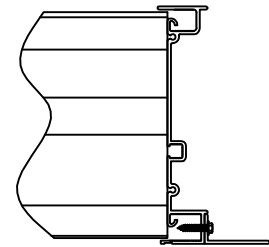

OPTIONAL FLANGED FRAME
(JAMB SHOWN)

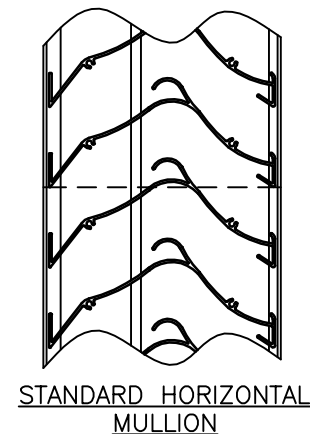

STANDARD HORIZONTAL
MULLION

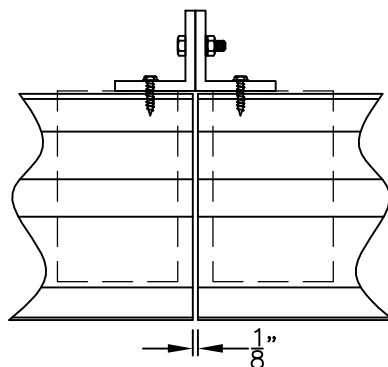

ARCHITECTURAL VERTICAL
MULLION OPTIONAL



American Warming and Ventilating LE-69 louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings, water penetration ratings, and wind driven rain ratings.



american warming
and ventilating

A MESTEK COMPANY

7301 INTERNATIONAL DRIVE
Phone (419) 865-5000


HOLLAND, OHIO
Fax (419) 865-1375

LE-69 STATIONARY LOUVER

DRN. BY DWW	DWG. NO. LE-69	REV.
DATE 7/3/12		

Water Penetration : 0.01 oz (3.0 g) at 1250 fpm (6.35 m/s) recommended free area velocity
Pressure Drop : 0.44 in wg (110 Pa.) at 1250 fpm(6.35 m/s) and 10025 scfm(4.73 scm/s)
Free Area : 8.02 sq ft (0.745 sq m) = 50.1% for 48" x 48" (1.22m x 1.22m) test size

INTAKE PRESSURE DROP

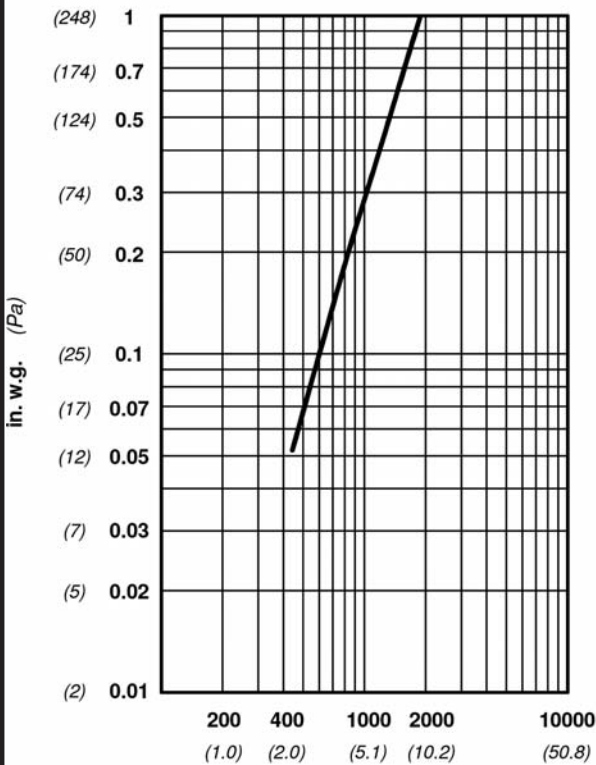

VELOCITY THROUGH FREE AREA fpm (m/s)
standard air - .075 lbs per cu ft

Ratings do not include the effect of a wire bird screen
Test based on a 48" x 48" test size per AMCA Standard 511
Figure 5.5. Data are based on intake performance.

FREE AREA IN SQUARE FEET (sq meters)

		WIDTH							
		in. mm	12 305	24 610	36 914	48 1219	60 1524	72 1829	84 2134
HEIGHT	12 305	0.30	0.69	1.07	1.45	1.84	2.22	2.60	2.99
	24 610	0.028	0.064	0.099	0.135	0.171	0.206	0.242	0.278
	36 914	0.070	0.159	0.248	0.337	0.426	0.515	0.605	0.694
	48 1219	0.112	0.254	0.397	0.540	0.682	0.825	0.967	1.110
	60 1524	0.154	0.350	0.546	0.745	0.938	1.134	1.330	1.526
	72 1829	0.196	0.445	0.695	0.944	1.194	1.443	1.693	1.942
	84 2134	0.238	0.541	0.844	1.147	1.450	1.753	2.055	2.358
	96 2438	0.280	0.636	0.992	1.349	1.705	2.062	2.418	2.775
	96 2438	3.46	7.87	12.29	16.70	21.11	25.52	29.93	34.35

Wind-Driven Rain Penetration Classes:		Discharge Loss Coefficient Classes:	
Class	Effectiveness	Class	Coefficient
A	100% to 99%	1	0.4 & above
B	98.9% to 95%	2	0.3 to 0.399
C	94.9% to 80%	3	0.2 to 0.299
D	Below 80%	4	0.199 & below


Wind Driven Rain Performance 29 mph (46.7 kph) with 3 in/h (76 mm/h)

Water Penetration	Effectiveness Ratio	Coefficient of Discharge	Core Velocity	Ventilation Airflow	Free Area Velocity
Class A	99.7%	Class 3	376 fpm (1.9 m/s)	4044 cfm (1.9 cm/s)	676 fpm (3.4 m/s)

Wind Driven Rain Performance 50 mph (80.5 kph) with 8 in/h (203 mm/h)

Water Penetration	Effectiveness Ratio	Coefficient of Discharge	Core Velocity	Ventilation Airflow	Free Area Velocity
Class A	99.2%	Class 3	201 fpm (1 m/s)	2165 cfm (1 cm/s)	362 fpm (1.8 m/s)

WATER PENETRATION

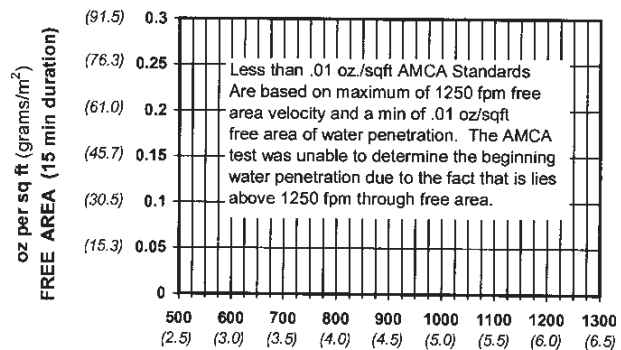

VELOCITY THROUGH FREE AREA fpm (m/s)
Both maximum recommended free area velocity and beginning of water penetration are 1250 fpm at standard air - .075 lbs per cu ft. The above water penetration data is based on mill finish, 48" x 48" test size per AMCA Standard 511.



American Warming & Ventilating certifies that the model LE-69 louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance, water penetration, and wind driven rain ratings.
LE-69